





< Characteristic >

Most Preferred Best seller LED module: CE, UL, RoHS Certified

Power Consumption: 0.72W LED provided by SAMSUNG

SMD LED mounted: Made in Korea

LED Driver: Constant Voltage Driving System

Max. 50 modules in series

Design of a new and unique CAP TYPE Optical Lens

Each unit can be used to cut.

Best Viewing Angle: 160°

LED Type: 2835

< Enhanced Function >

Stylish Appearance design: SHALLOW TYPE of Optical Lens


Design for Humid & Waterproof: IP68

Easy Installation & Maintenance

< Applications >

- * Narrow and Close-fitting Channel letters
- * Flex light Box illumination
- * Duplex light Box illumination

< Dimension >

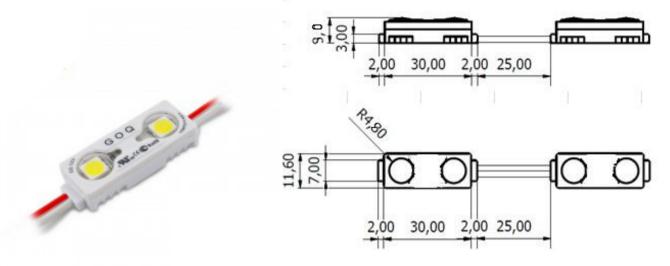

< Specification >

ltem	Value	Unit
Product No.	GOQ MINI LED(WHITE)_SHALLOW	
Power Consumption	0.72	Watt
Input Voltage	12	VDC
Input Current	60	mA
View Angle	160	0
Luminous intensity	60	lm(Typ.)
CRI	80	%
Module Pitch	25	mm
Size	34 X 11.6 X 9.0	mm
Weight	3.8	g
Max. in Series	50	EA
Operating Temp	- 30 ~ 85	
Storage Temp	- 40 ~ 100	
Waterproof	IP68	
Cable	UL, 20AWG 300V/80	
Case materials	UL, ABS, VO-class	
Lens materials	UL, SAN, VO-class	

< LED Specification >




Absolute Maximum Ratings

Item	Symbol	Rating	Condition	
Operating temperature range	Тор	-40°C ~ +85°C	2	
Storage temperature range	T _{stg}	-40°C ~ +120°C	=	
LED junction temperature	TJ	110°C	-	
Forward Current	l _F	150 mA	22.7	
Peak Pulsed Forward Current	I _{FP}	300 mA	Duty 1/10 pulse width 10ms	
Thermal resistance	R _{th.} j-s	16°C/W	Junction to solder point	
Assembly Process Temperature	3222	260°C, < 10sec	=	
ESD	-	5kV	НВМ	

Characteristics

Item	Unit	Nominal CCT	Product Code	Rank	Min	Тур	Max
Forward Voltage ¹⁾ (V _F) (@85 mA, Ts = 25°C)	v	-	-	AZ	2.70	S - 1	2.80
				A1	2.80	7 E	2.90
				A2	2.90	-	3.00
				A3	3.00	4	3.10
				A4	3.10	4	3.20
Luminous Intensity ²⁾ (I _v) (@85 mA, Ts = 25°C)	lm	10000K	'WAAUS0	SO	24.0	-	31.5
Reverse Voltage (@5 mA, Ts = 25°C)	v	-	L	150	0.7	-	1.2

Spectrum (Ts=25°C)

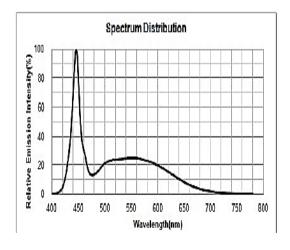

Radiation Characteristics

